


number of rows  
4

orientation of modules  
horizontal

inclination angle  
25°/30°/35°

available fixings  
driven prestressed  
concrete pile

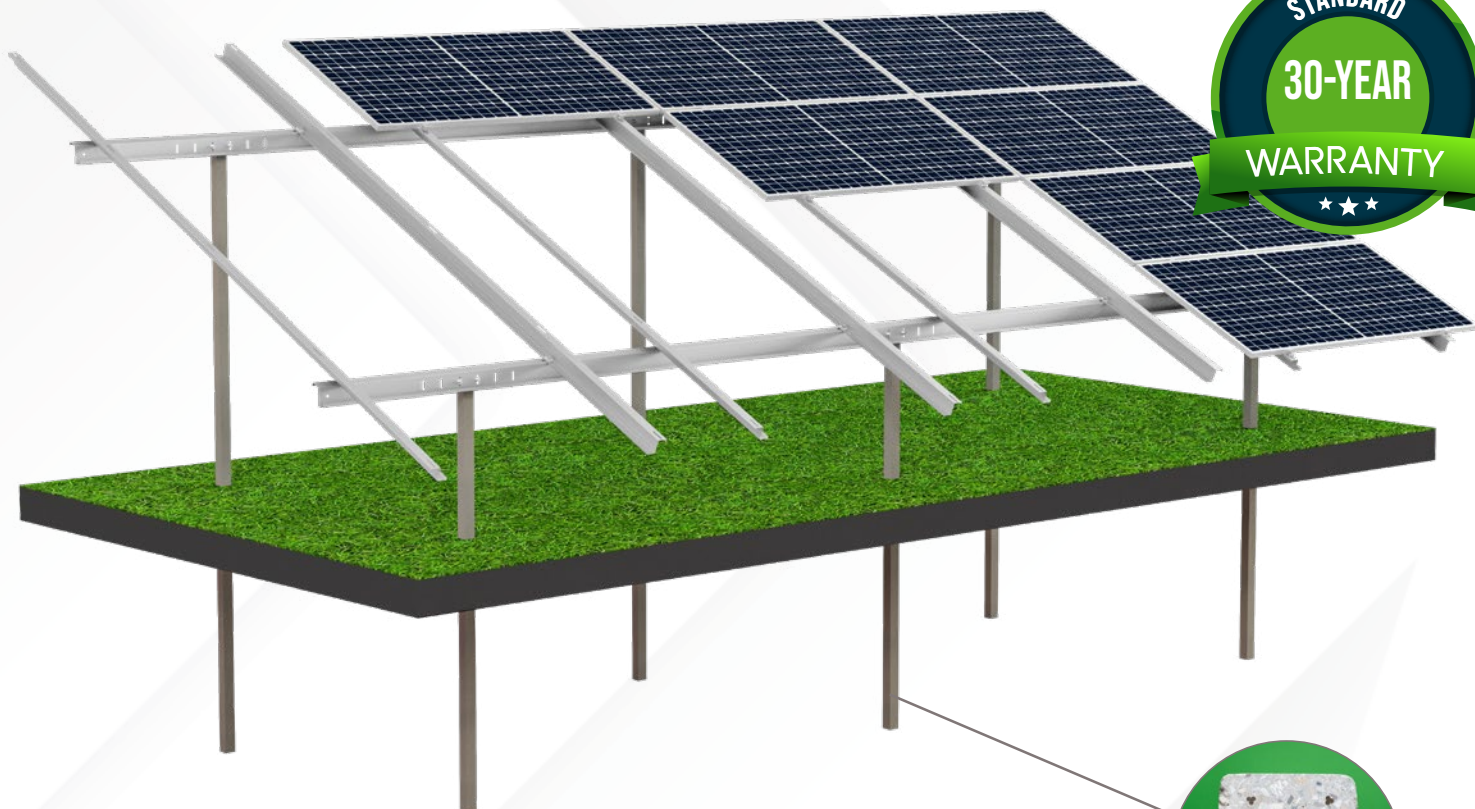

## Profiles

pile <b>Prestressed Concrete</b> 70/75	fasteners A2-70/TZN	beam [standard] Z 20/50/100/50/20 x 2,00mm
purlins [standard] Z 15/40/60/40/15 x 1,5mm	ALU clamps Silver or black clamp or clampless mounting [option]	

## Properties

- C55/67 class concrete
- construction for each module size
- **Magnelis®** corrosion protection for steel components
- **25 year guarantee** for **Magnelis®** coating
- **30 year guarantee** for elements in the ground

## Standards

EN 1090-2, EN 1990:2004,  
EN 1991-1-3, EN 1991-1-4,  
EN 1993-1-1:2006P,  
EN 1993-1-3:2008P,  
EN 1993-1-5:2008P  
EN 1992-1-1:2008