


number of rows  
1

orientation of modules  
vertical

inclination angle  
25°/30°/35°

available fixings  
driven steel pile

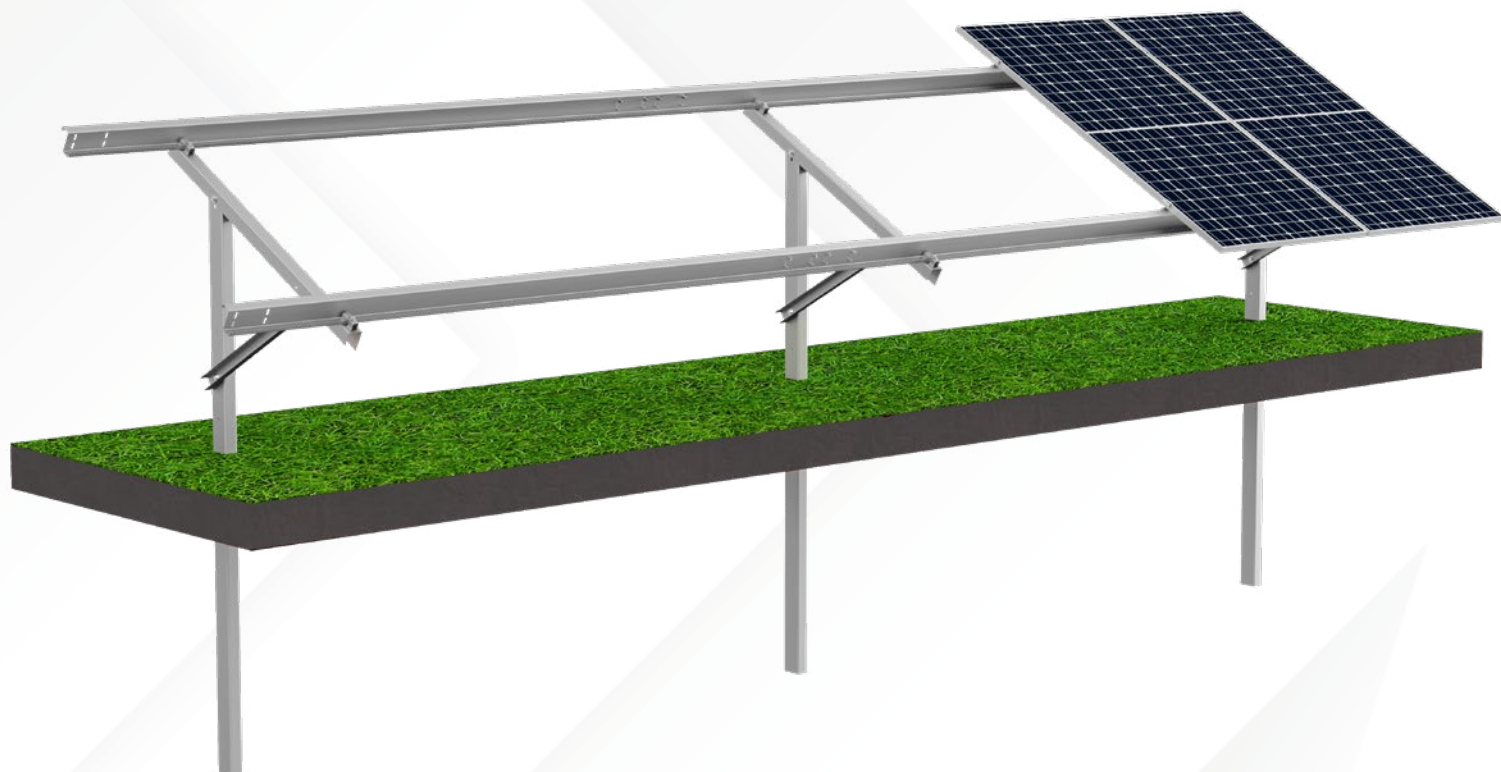

## Profiles

pile

C 20/60/100/60/20 x 2,5mm

strut

U 40/60/40 x 2,0mm

beam

U 65/65/100 x 2,0mm

purlins

Z 20/50/100/50/20 x 1,5mm

fasteners

A2-70/TZN

ALU clamps

silver or black

## Properties

- construction for most module size
- anti-corrosion protection **Magnelis®**
- **25 year guarantee** for **Magnelis®** coating
- **25 year guarantee** for elements in the ground

## Standards

EN 1090-2, EN 1990:2004,  
EN 1991-1-3, EN 1991-1-4,  
EN 1993-1-1:2006P,  
EN 1993-1-3:2008P,  
EN 1993-1-5:2008P,